SOLAR PANEL

MONOCRYSTALLINE


4SUN-FLEX-M 120W Prestige

Kod produktu: P0173

120W
Maximum power

22%
Cell efficiency

+3%
Power tolerance

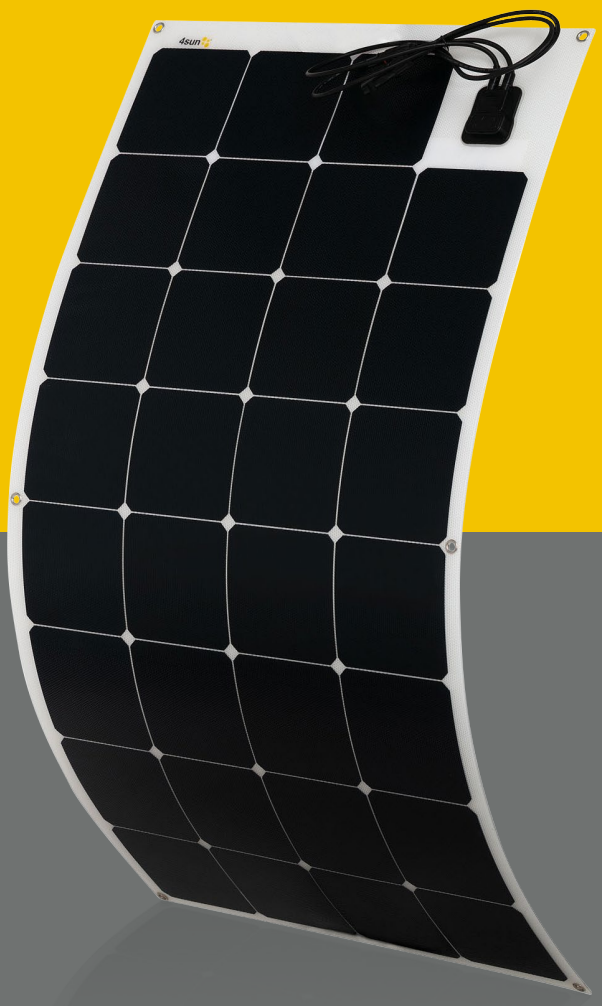


- 2-year warranty on workmanship

TECHNICAL DATA

Model	4SUN-FLEX-M 120W Prestige
Cell Type	SUNPOWER Monocrystalline
Peak Power (Pmax) [W]	120
Power Tolerance [%]	+3%
Max. Power Voltage (Vmp) [V]	19,50
Max. Power Current (Imp) [A]	6,15
Open Circuit Voltage (Voc) [V]	23,40
Short Circuit Current (Isc) [A]	6,77
Length [mm]	1060
Width [mm]	540
Depth [mm]	3
Weight [kg]	1,7
Terminal	MC4
Maximum system voltage	600V DC
Cables	900mm / 2×2,5mm²
Working temperature	-40˚C ~ +85˚C

*Parameters are specified under STC conditions: 1000 W/m2; 25 degrees C; AM 1.5.

TECHNICAL DRAWING (mm)

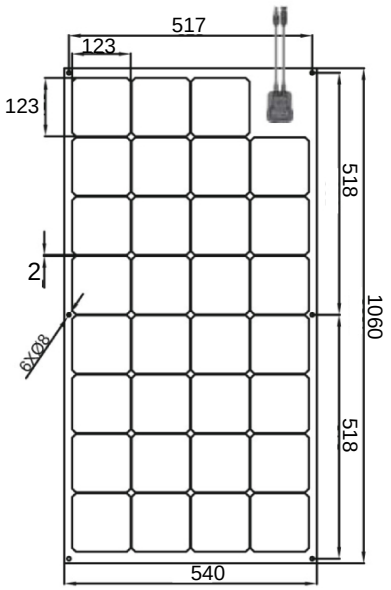

The dimensions given are measured to the center of the mounting hole.
Differences between individual batches may be ±5mm.