# SOLAR PANEL
## MONOCRYSTALLINE
# 200W BF MAXX HC

**64 cells**
Monocrystalline

**200W**
Maximum power




MAXX

## TECHNICAL DATA


| INDEX | P0182 |
|---|---|
| MODEL TYPE | 200W BF Maxx |
| Peak Power (Pmax) [W] | 200 |
| Maximum Power Voltage (Vmp) [V] | 18.1 |
| Maximum Power Current (Imp) [A] | 11,05 |
| Open Circuit Voltage (Voc) [V] | 21,72 |
| Short Circuit Current (Isc) [A] | 11,95 |
| Maximum System Voltage | 1000VDC(IEC) |
| Power Tolerance | +3% |
| Cell Type | Monocrystalline |
| Dimensions [mm] | 1410x700x35 |
| Weight [kg] | 11 |
| Output cables | 30cm 2x4.0mm² |
| Warranty | 5 years |
| Bus Bar | 12BB |
| Junction box | IP68 |
| Front Glass (tempered glass) | 3,2mm |
| Frame | black |

## TECHNICAL DRAWING (mm)

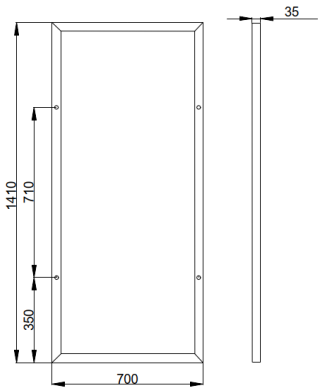


The dimensions given are measured to the center of the mounting hole.
Differences between individual batches may be ±5mm.

## CHARACTERISTIC

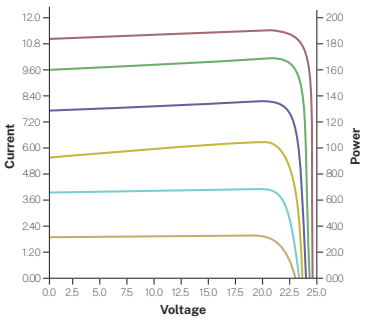


ISO9001
ISO14001
OHSAS18001
IEC TS 62941

The electrical parameters listed on the product label may differ slightly from the specifications.


4sun®

**4Sun sp. z o.o. sp.k.**
Annopol 4, 03-236 Warszawa
tel: (22) 114 98 05, email: biuro@4sun.eu

www.4sun.eu